

MS31 Hood Dashboard Removal and Installation

Step 1: Use a Phillips screwdriver to turn out two screws on both the left and right sides.



Figure 1

Step 2: The "speed knob" bottom can be pulled it upwards out.



Figure 2

Step 3: Use a 12mm open-end wrench to unscrew the "key" bottom;
Use a 10mm open-end wrench to unscrew the "speed" bottom



Figure 3

Step 4: Press a flat-blade screwdriver against any corner to rotate and remove the light switch.

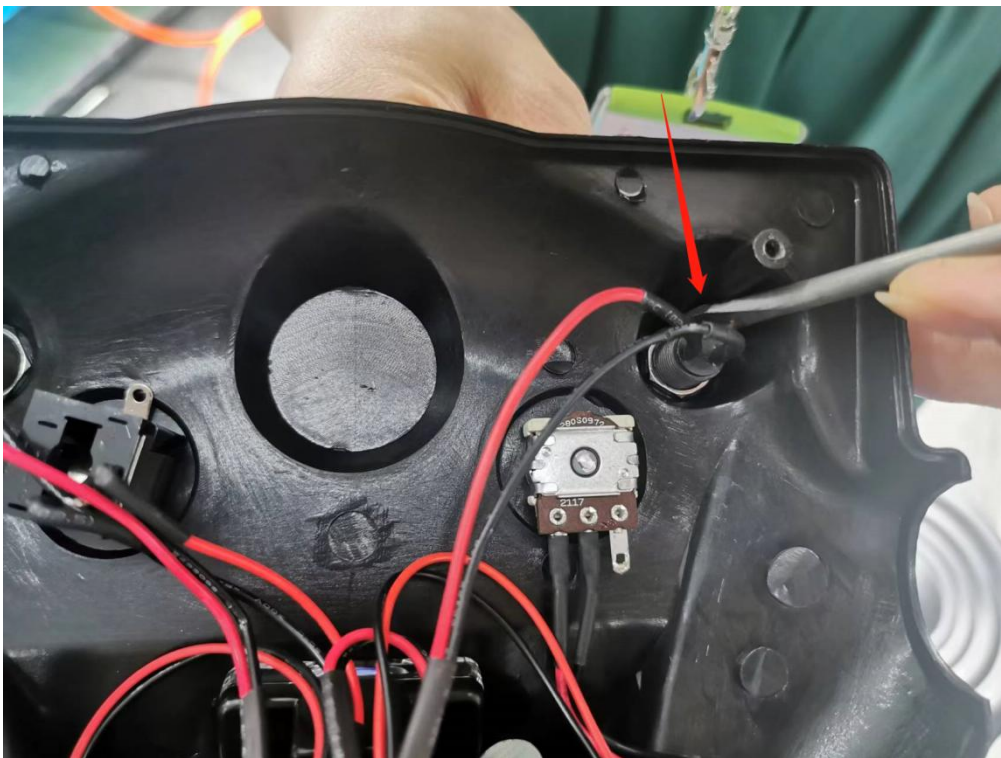


Figure 4